


ALLMAXX S


separating machine

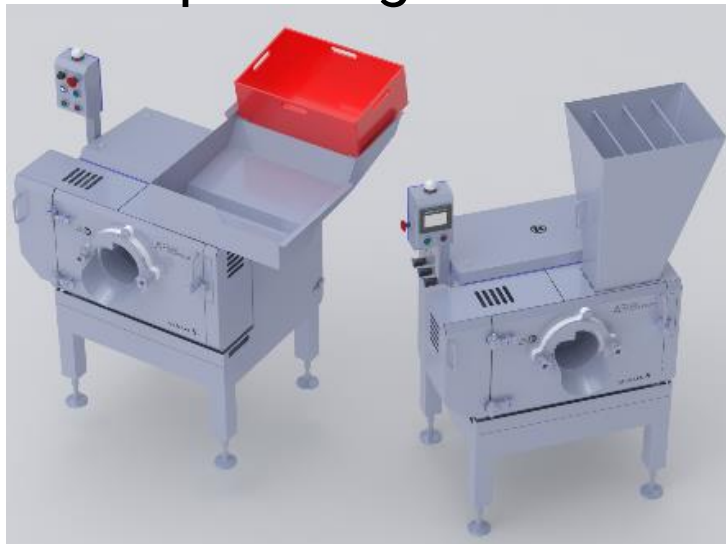

- 3 kW power (motor)
- Up to 1.5 t/h throughput (depending on the product and perforated drum used)
- perforated drum available in the following hole diameters: 1 mm, 1.3 mm, 2 mm, 3 mm, 4 mm, 5 mm, 8 mm
- “TecBelt” functional belt available in the following thicknesses: 10 mm, 13 mm, 16 mm
 - The large travel distance of the pressure roller enables the use of a 10 mm functional belt, which is sufficient for many products and makes the functional belt even more attractive in terms of price
 - Experience has shown that 13 mm and 16 mm functional bands are used for harder products

- Variants:
 - Funnel variant for product feeding via a conveyor unit
 - Manual feed
 - > Both variants are modularly interchangeable
 - Display or push button operation
- Standard equipment:
 - Level sensor for an optimized separation process
 - Stepless speed control
 - FlexxPress technology: enables consistent product quality
 - Push button operation
- options:
 - automatic lubrication pump
 - display variant
 - Tamper (for optimized product intake for larger products)
- Tool-free opening of the front panel
- products:
 - meat
 - poultry
 - fish
 - vegetables
 - fruits
 - Depacking, Recycling
 - Alternative proteins
 - And much more
- Hygienic machine design by avoiding dead spaces
- No lubrication points in the product area
- Controlled return of grease from the bearing points

- **Variant manual infeed**

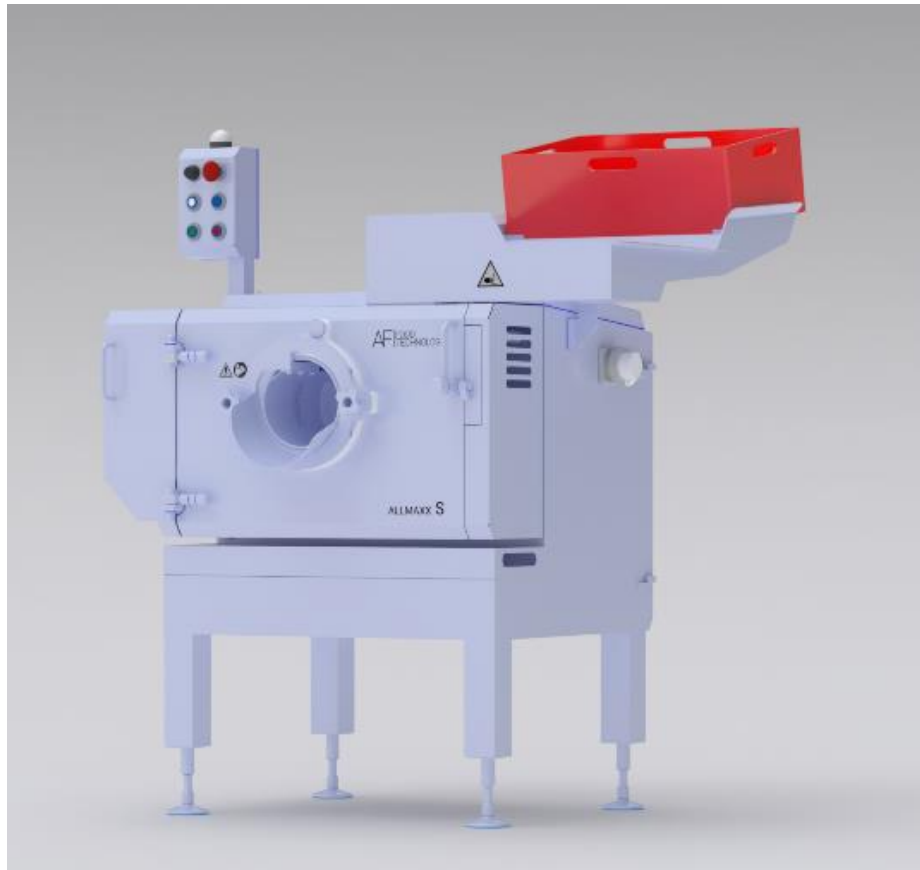

Variant funnel infeed




Highlights:

The clean, hygienic machine design enables easy handling while all components are extremely robust



Simple, intuitive
adjustment of pressures



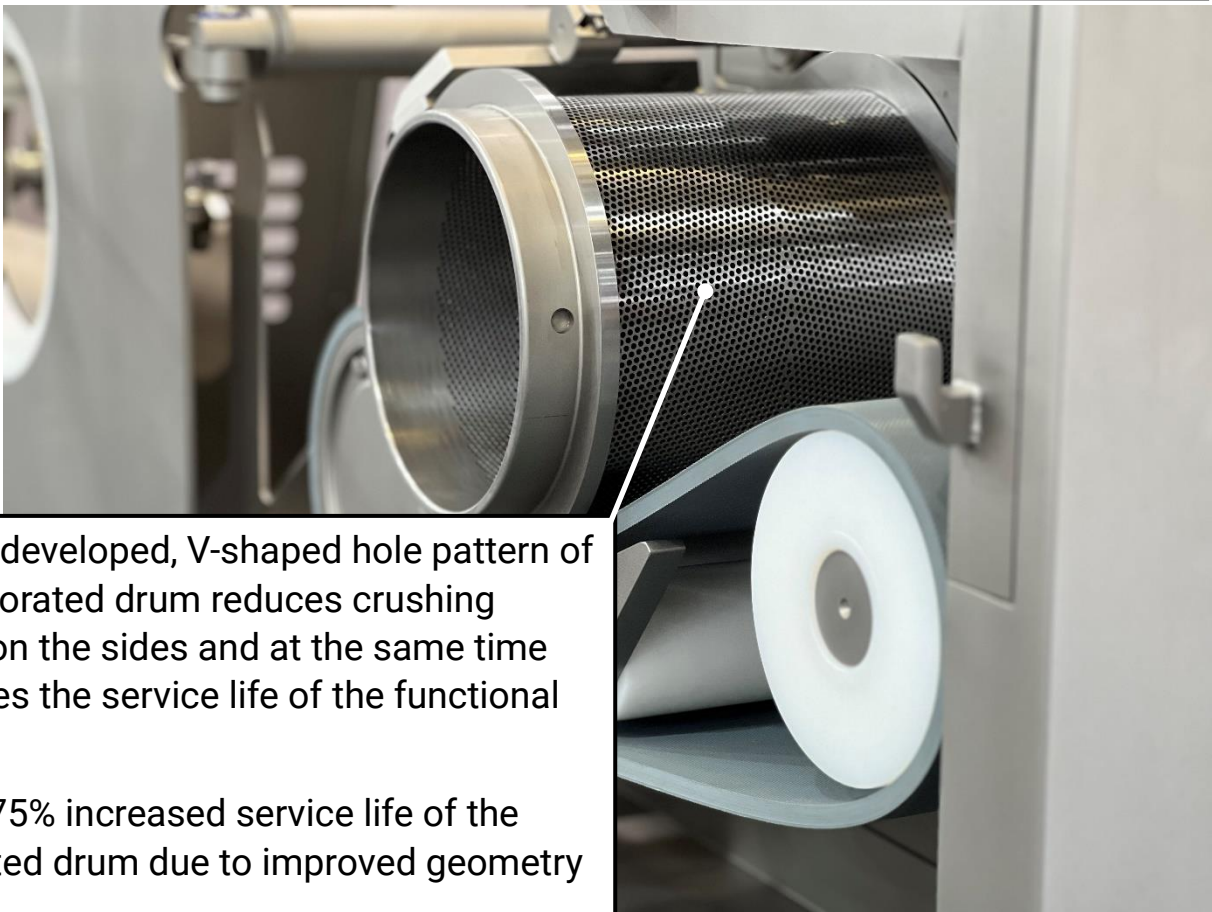

- Newly developed, V-shaped hole pattern of the perforated drum reduces crushing losses on the sides and at the same time increases the service life of the functional belt
- Up to 75% increased service life of the perforated drum due to improved geometry
- Product-friendly process due to increased number of holes

Display version

(enables automatic pressure control and storage of various products)



Push button version

(Standard scope, simple, intuitive handling by the operating personnel)

